



SHENZHEN RISE ELECTRONIC CO., LTD.

Website: <http://www.ideacamera.com> Email: cctv@ideacamera.com

Global Sources Homepage Address: <http://www.globalsources.com/ideacamera.co>

**HD 2.0Megapixels Vandal-proof IR Dome 1080P IP Camera with
3.0megapixels 3.6mm HD Fixed Lens, Support POE Power
Supply (optional), VSS Mobile APP.**

FOB: US\$36.59-US\$41.59

Model: RC-DVF90E-2MPV (POE Optional)




With POE (inside)



SHENZHEN RISE ELECTRONIC CO., LTD.

Website: <http://www.ideacamera.com> Email: cctv@ideacamera.com

Global Sources Homepage Address: <http://www.globalsources.com/ideacamera.co>

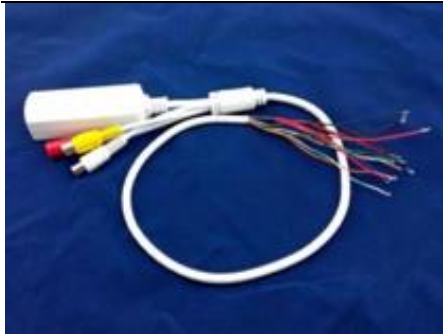

With POE (outside)

Key features:

3.0-megapixel 3.6mm HD Fixed Lens (4, 6, 8mm optional).

30 pieces IR LEDs, 25 meters of IR distance.

White metal casing.

Normal network video cable.

Internal POE (Optional).

Key specifications:

32 bit DSP (1/2.8" SONY IMX323 low-illumination CMOS+ Hi3516Cv300 Sensor).

1920*1080p High resolution video output.

H.264/H.265 high profile, dual streaming, AVI format, 0.1M~8Mbps adjustable.

Supports Smartphone, Support Android, iPhone.

Surprisingly powerful platform software (IMS300).

Support night vision (with HD IR CUT).

Support ONVIF 2.6 protocol.

Supports multi network protocol.

Protocol provide a unified free client free to achieve video recording/playback/preview.

Supports ICR filter switching function, day and night surveillance.

Support varieties network video recorder and other backend equipment.

Support POE power supply (optional).

Support VSS Mobile APP.

Product Advantages:

Offer 2-years product warranties.

Logistics convenient.

OEM/ODM.

CCC/CE/FCC Certified.

Strict product quality control.



SHENZHEN RISE ELECTRONIC CO., LTD.

Website: <http://www.ideacamera.com> Email: cctv@ideacamera.com

Global Sources Homepage Address: <http://www.globalsources.com/ideacamera.co>

Efficiently working with almost NVR.

Lower price.

6-8 working day per order.

Product applications:

This is the best product of safety field. It and hard disk video recorders、cable、power supply、display、etc. Constitute a complete security system. Tts application is more extensive. Such as homes、factories、highways、office building、garden、community, or a large public places, etc.

2MP HD Network Module Parameters

Descriptions	2MP HD Network module
System Structure	Embedded RTOS, dual-core 32bit DSP(Hi3516Cv300),pure hard compression, watch dog;
Image sensor	1/2.8" SONY IMX323 CMOS, support IR-CUT, support photo resistance signal linkage, CS lens; color 0.6Lux@F1.2,black/white:0.08 Lux@F1.2 ;
Video compression	H.264/H.265,support dual-stream,AVI;0.1M~8Mbps variable;1~30f/s variable;
Image output	main stream: 1920*1080p, 1280*720p;sub-stream:704*576p;
Audio interface	no
audio compression	no
network interface	1*RJ45 10/100M;support RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP etc.;
auto iris	no
photo resistance	one photo resistance interface, support photo resistance signal links to IR-CUT
PTZ	no
USB	no
alarm input	Support(optional)
alarm output	Support(optional)
SD	no
Features	Support WEB, OSD, live video transmission, motion detect and IO alarm, front-end storage/playback/download, MJPEG capture; united remote client monitoring software、MYEYE; perfect SDK;



SHENZHEN RISE ELECTRONIC CO., LTD.

Website: <http://www.ideacamera.com> Email: cctv@ideacamera.com

Global Sources Homepage Address: <http://www.globalsources.com/ideacamera.co>

ONVIF	support
Mobile monitoring	Support multiple mobile monitoring (IOS, Android)
Other functions	DC12V,3W(consumption),38mm*38mm;
Notes	Support POE (optional) , B1-type tail-line (without BNC interface)